

MPTQ7815


Softlogic

Видеорегистратор для правоохранительных органов



- Двухпоточное сжатие H.264
- Разрешение записи до 25к/с@1080P
- Поддержка "one-key" для начала записи, снятия фото, тревоги и групповых разговоров
- HD LCD, сенсорный экран
- Поддержка hot-swap SD card
- Беспроводная связь: Bluetooth, Wi-Fi, 2G, 3G, 4G
- Поддержка GPS и GLONASS
- Поддержка Bluetooth, идентификация отпечатка пальца, распознавание номерных знаков

Размеры (мм)

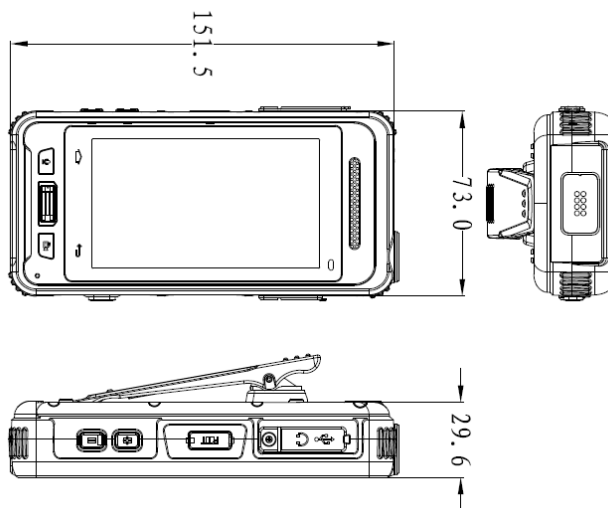

GSM:GSM850(B5)/GSM900(B8)/DCS1800(B3)/
PCS1900(B2),
CDMA EVDO:800Mhz(BC0)
WCDMA:B1/B2/B5/B8;
TD_SCDMA:B34/B39;
LTE:B1/B2/B3/B4/B8/B20/B38/B39/B40/B41

Technical Specification

Система

Микропроцессор	1.3G 4 core CPU
Операционная система	Android 5.1

Объектив

Фокусное расстояние	3.72mm
Широкоугольный	64°
Апертура	F2.4±5%
Авто Фокусировка/AWB	Auto

Видео

Сжатие	H.264
Разрешение/кадров	1080P:25fps; 720P/D1/VGA/CIF:30fps
Сдвиг	Support; Max. resolution:3264*2448

Аудио

сторонний разговор

Сжатие	G711a,ACC
Two-way talk	1.5W loudspeakers, support PTT

LCD

Dimension	4.0 inch TFT LCD, support touch screen
Resolution	854*480
Brightness	Automatic control

Network

Positioning system	GPS, GLONASS
Wireless Access	Bluetooth, NFC,WiFi(2.4G/5G),2G,3G,4G

Battery

Capacity	4000mAh
Standby Time	400h
Charging Time	<3h
Battery Capacity Threshold Alarm	When battery left power is less than 14%, the buzzer begins beeping regularly to alert you to recharge
LCD Power Management	System can automatically shut down LCD power after the MPT stopped operation for specified time such as ten seconds (adjustable)
Installation	Build-in, replaceable

Storage

Flash	2GB RAM + 32GB ROM
Micro SD	Support 256G Micro SD card to expand storage

Auxiliary Interface

Display Interface	1 HDMI input
USB Interface	Mini USB2.0 high-speed interface
Headphone Interface	3.5mm
Extended Interface	Support external substructure, external camera access

General

Dimension	151.5 mm× 73 mm× 29.6mm
Weight	340g
Ingress Protection	IP67
Working Environment	-10°C ~+55°C / 10%~90%RH

Certifications

CE	FCC
----	-----